


UC900 HS23 Cat.7

S/FTP AWG23/1

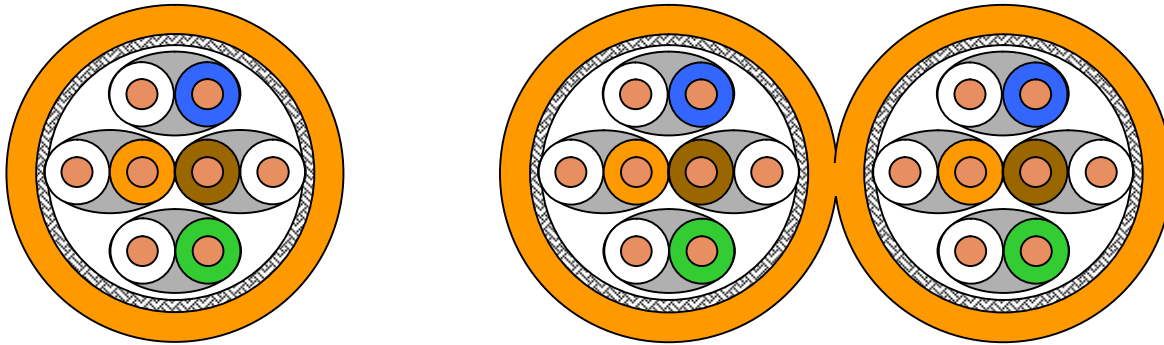

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T
IEEE 802.5 16 MB; ISDN; TPDDI; ATM

Standards

EN 50173-1; EN 50288-4-1
ISO/IEC 11801; IEC 61156-5

Flame resistance

LSHF (LSOH): IEC 60332-1; IEC 60754-2; IEC 61034

Construction

Conductor	bare copper wire, Ø 0.56 mm (AWG 23)
Insulation	Foamskin PE, Ø 1.38 mm
Twisting	2 cores to the pair
Pair screen	Al-laminated plastic foil
Cable lay up	4 pairs (PiMF) to the core
Screen	copper braid, tinned (ca. 40 % coverage)
Sheath	LSHF or LSHF-FR, orange

Mechanical properties

Bending radius	without load	≥ 30 mm
	with load	≥ 60 mm
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C